


LT84780-1.375M

Description: Solid Molded Rubber Follower Plate for 120LB(16 Gallon) (54.4KG) Drum

1. Follower Plate Solid Molded Rubber for a 120LB(16 Gallon) Drum, for Pump with a 1-3/8"(3.49cm) Diameter Downtube
2. Center Downtube Diameter Opening 1-3/8"(3.49cm) for a Grease Pump or equivalent pump with a 1-3/8" (3.49cm) Diameter Downtube
3. Diameter of Follower Plate: 14-1/4"(36.2CM); Includes a 5/8"(1.59CM) foldable rubber lip around the outer diameter
4. Other Downtube Diameter Inserts available in 1-1/4" (3.175CM), 1-3/8"(3.49CM), 1-1/2" (3.81CM), 2-1/8" (5.4CM). (See Chart Below)
5. Provides a tight seal on the outer surface of the container for a vacuum suction and better priming in the downtube; forces grease at the bottom of the container from the outer edges toward the center of the pail and to the downtube to reduce waste.
6. **Application:** Standard 120LB(16 Gallon) (54.4KG) Drum of Grease and any pump supporting a Downtube Diameter of: 1-3/8"(3.49cm) ; (See Chart Below)
7. **Other Information: Weight and Dimensions:**
BOX Weight: 7LBS(3.2KG)
BOX Dims: Length: 17"(43.2CM) X Width: 17" (43.2CM) X Height 6" (15.2CM)

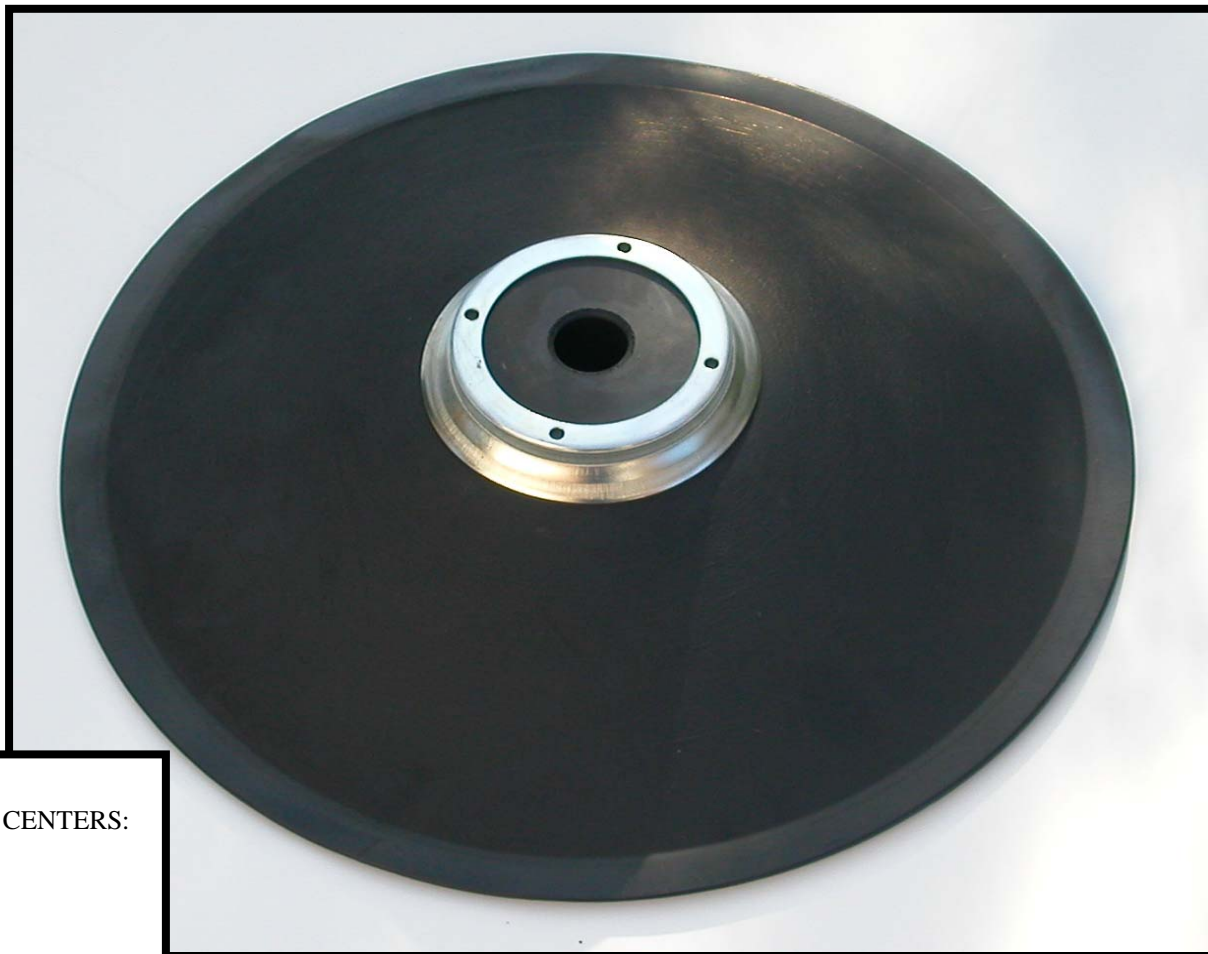

DONUT / RUBBER INSERT CHART

FOLLOWER PLATES WITH LARGER DIAMETER INSERT CENTERS:

STANDARD: 1.0" Order Model # LT84780-M

OPTIONAL: 1-1/4" Order Model # LT84780-1.25M

OPTIONAL: 1-3/8" Order Model # LT84780-1.375M

OPTIONAL: 1-1/2" Order Model # LT84780-1.50M

OPTIONAL: 2-1/8" Order Model # LT84780-2.125M

WILLMAR INTERNATIONAL LLC / LUBE TECHNOLOGY

P.O. BOX 456; ADA, MI. 49301 USA

TEL: 616-676-1792; FAX: 616-676-1287

Contact: willmarllc@gmail.com

Website: <http://www.iserv.net/~wmograde/lube.html>



"Doing Business with the World"

WILLMARLUBE

P.O. BOX 456; ADA, MI. 49301 USA

TEL: 616-676-1792; FAX: 616-676-1287

Contact: sales@willmarlube.com

Website: <http://www.willmarlube.com>