

LT82398ME


Description: 3:1 Air Operated Stub Pump Assembly for Oil:

1. Includes 3:1 Double Acting Low Pressure Stub Pump(LT82396ME)
2. 4ft(1.23mts)x 1/2" Low Pressure Oil Connection Hose
3. 3ft(.92mtr) Air Connection Hose
4. Rapid Disconnect Coupler(815ME) & Air Nipple(11660ME)
5. Muffler(LT2601ME)
6. Threaded Bung Adapter (40045ME) for installation on a Drum or Tank
7. Volume Union Oil Swivel 1/2"(f) x 1/2"(m) (925ME) and Reducing Bushing 3/4"NPT(m) x 1/2"NPT(m);
8. Air Inlet: 1/8"NPT(f); Recommended Air Pressure 80 to 100PSI
9. Lubrication Outlet: 3/4"NPT(f)(1.91CM)
10. Air Motor Cover(91407ME)
11. Pump Tube Diameter: 1-7/8"(4.76CM); Pump Tube Length 6-43/64"(17CM); Air Motor Height: 11.0"(27.94cm); Overall Height: 20-1/4"(51.5CM).
12. Output: 4 Gallons/minute (15.1LTRS/MIN)(Free Delivery)
13. Made for connection in an Installed Lube System to supplies Reels or as a Stand Alone Unit with a control Valve and longer hose
14. **ONE Year Warranty against Materials, Workmanship and Labor**
15. **Application:** Installed Lube Systems; Lube Trucks; Single Service with Extension Hose and Control Valve; Tanks; or Mounted on a wall system
16. **Additional Accessories Available:**

Recommended for use with Low Level Cut off Valve LT85765ME
LT82956ME: Oil Strainer for Pump Tube;
LT780ME Gear Oil Control Valve 1/2" NPT(f); Includes:82067ME Shut-Off Valve with built-in Swivel and 82070ME Non-Drip Nozzle Extension.
Maximum Operating Pressure 1000PSI.
LT775ME: HD Volume Oil Control Valve 1/2" NPT(f); Includes 82906ME Shut-Off Valve and 82932 Rigid Extension Nozzle; Maximum Operating Pressure 1000PSI.

18. Complete Repair Kits Available:

R83071ME: Simple Repair Kit for Oil Pumps LT82398ME
LT83000ME: Air Motor Repair Kit for LT82398ME

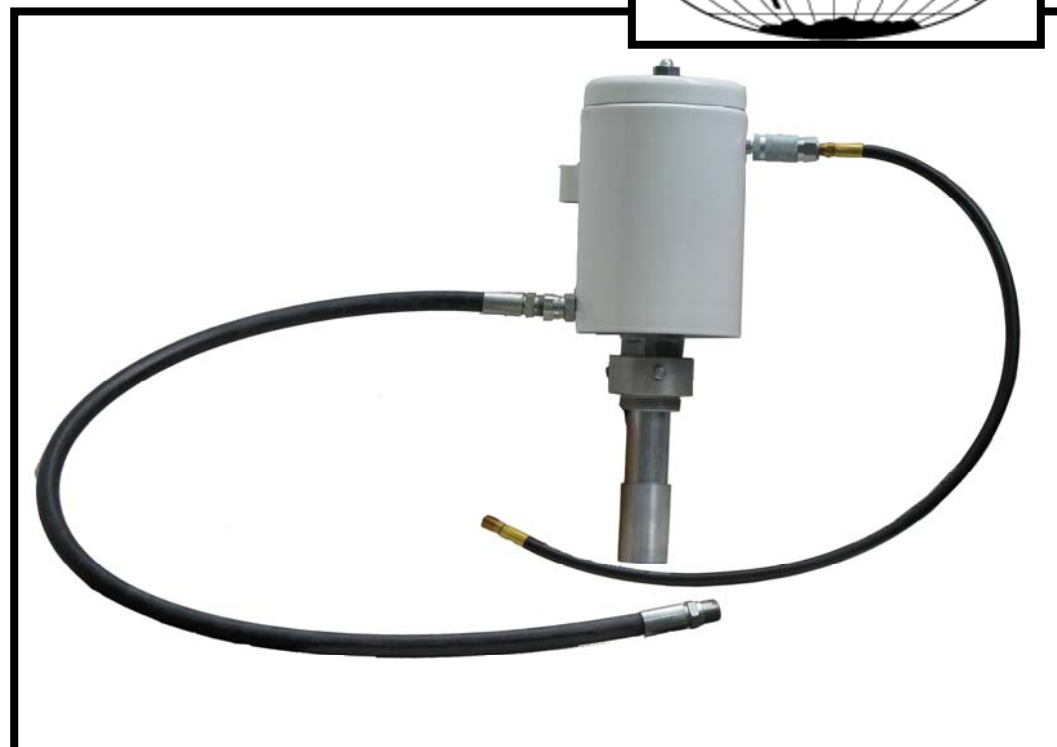

19. Other Information: Weight and Dimensions:

BOX Weight: 22LBS (10KG)
BOX DIM: Length: 14"(35.6cm)XWidth:13"(33.0cm)XHeight: 26"(66.1cm)

WILLMAR INTERNATIONAL LLC / LUBE TECHNOLOGY
P.O. BOX 456; ADA, MI. 49301 USA
TEL: 616-676-1792; FAX: 616-676-1287
[Contact: willmarllc@gmail.com](mailto:willmarllc@gmail.com)
[Website: http://www.iserv.net/~wmogrady/lube.html](http://www.iserv.net/~wmogrady/lube.html)



"Doing Business with the World"

WILLMARLUBE
P.O. BOX 456; ADA, MI. 49301 USA
TEL: 616-676-1792; FAX: 616-676-1287
[Contact: sales@willmarlube.com](mailto:sales@willmarlube.com)
[Website: http://www.willmarlube.com](http://www.willmarlube.com)